

FIG. 1

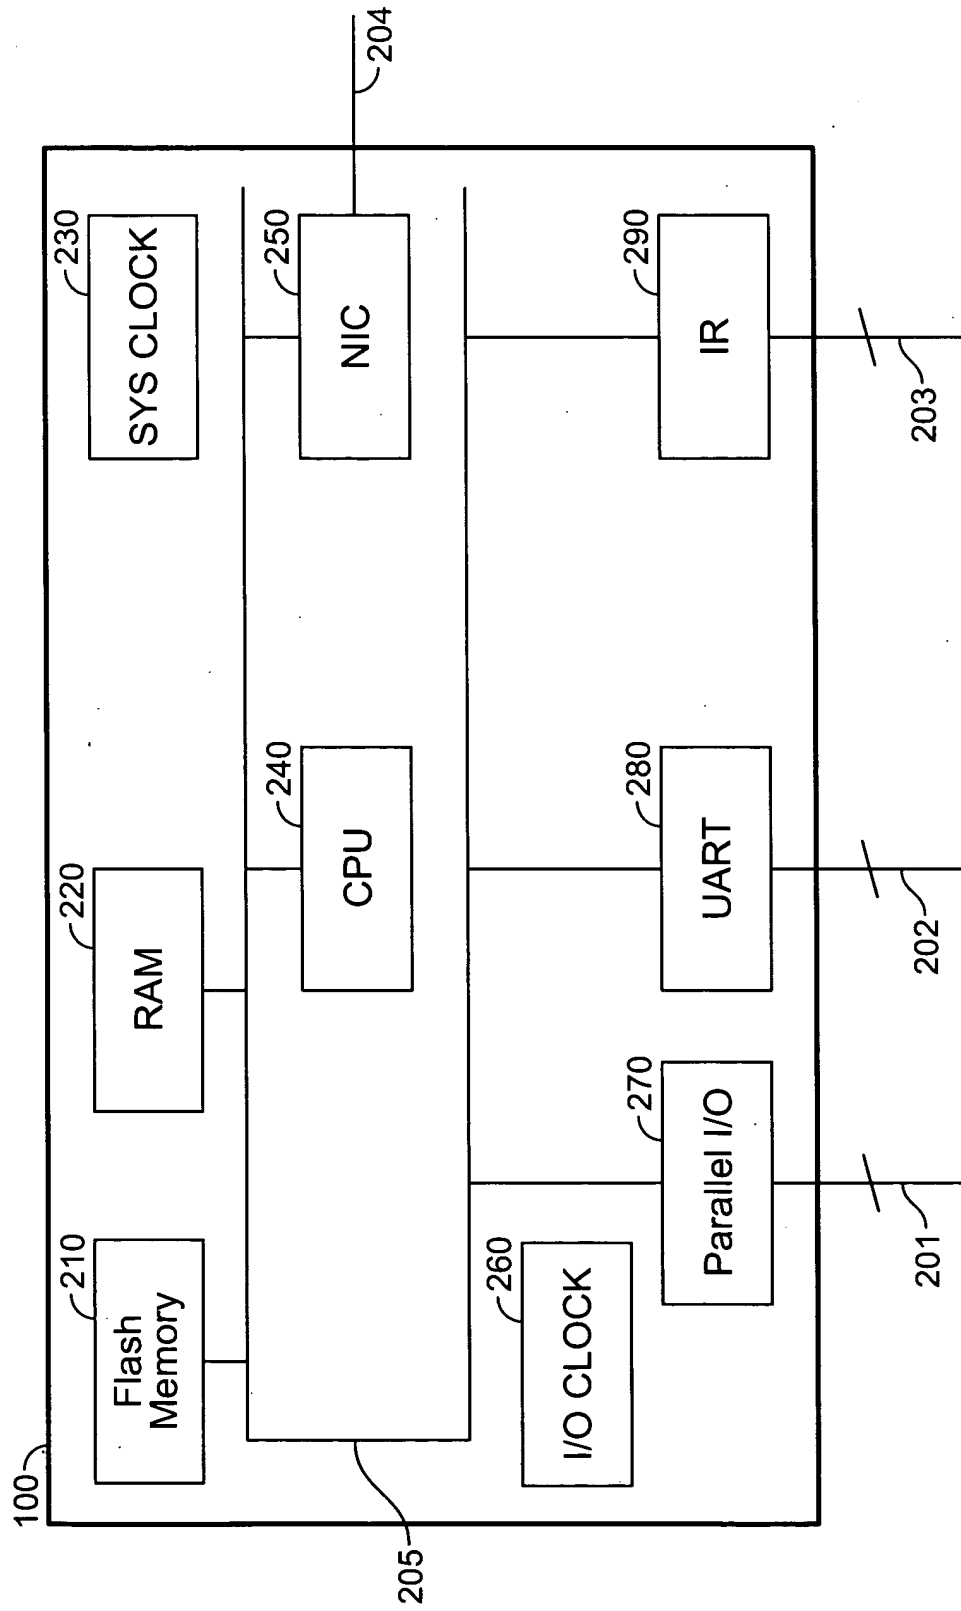


FIG. 2

Serial Port Settings

Serial Port:

☒ 1
 ☐ 2

Port type:

RS-232

Baud rate:

9600

Data bits:

8

Parity:

None

Stop bits:

1

Flow control:

None

Submit

Cancel

FIG. 3

Flex I/O Port Settings						
Port	Mode	Pull-up	Threshold*	Lower* (0.25,3V)	Upper* (0.25,3V)	Status
1	Digital Input	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	0.9	1.0	Off
2	Digital Output	<input checked="" type="checkbox"/>	<input type="checkbox"/>			Off (5V)
3	Digital Output	<input checked="" type="checkbox"/>	<input type="checkbox"/>			Off (5V)
4	Digital Output	<input checked="" type="checkbox"/>	<input type="checkbox"/>			Off (5V)

* Lower and Upper Threshold settings are for Digital Input only.

FIG. 4

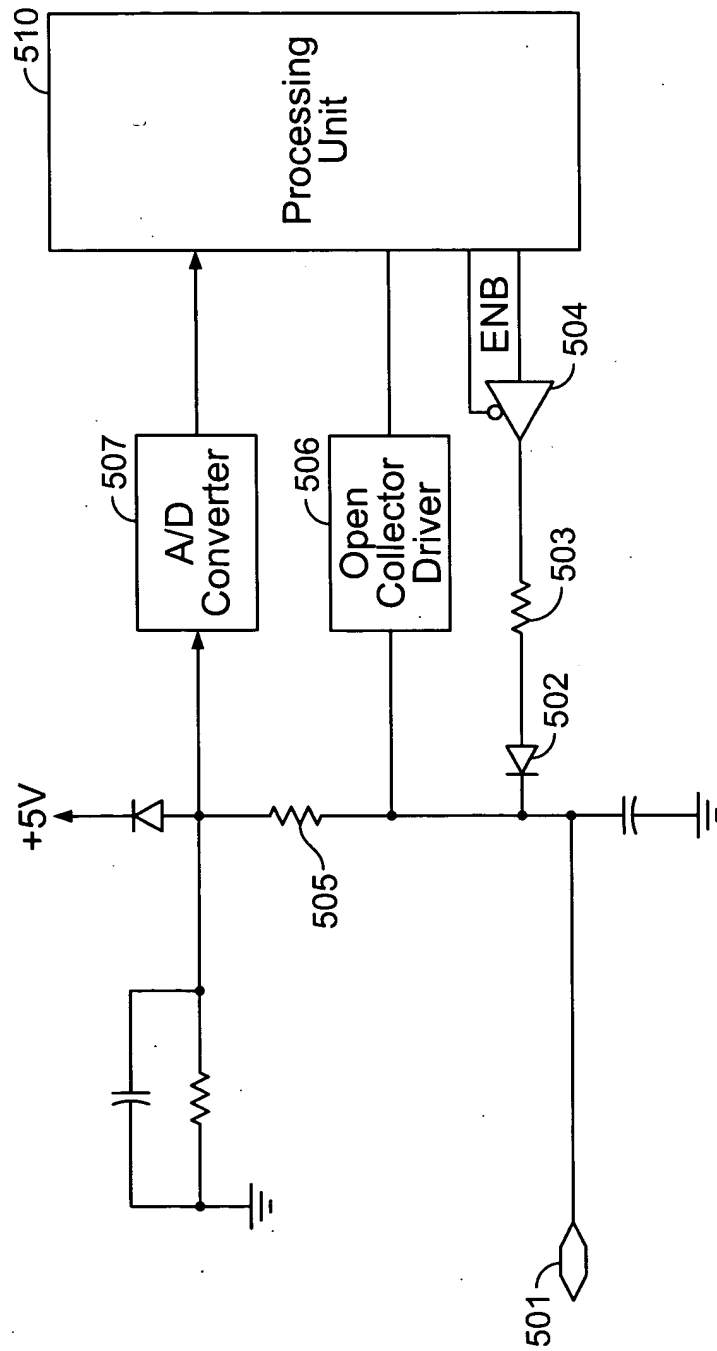


FIG. 5

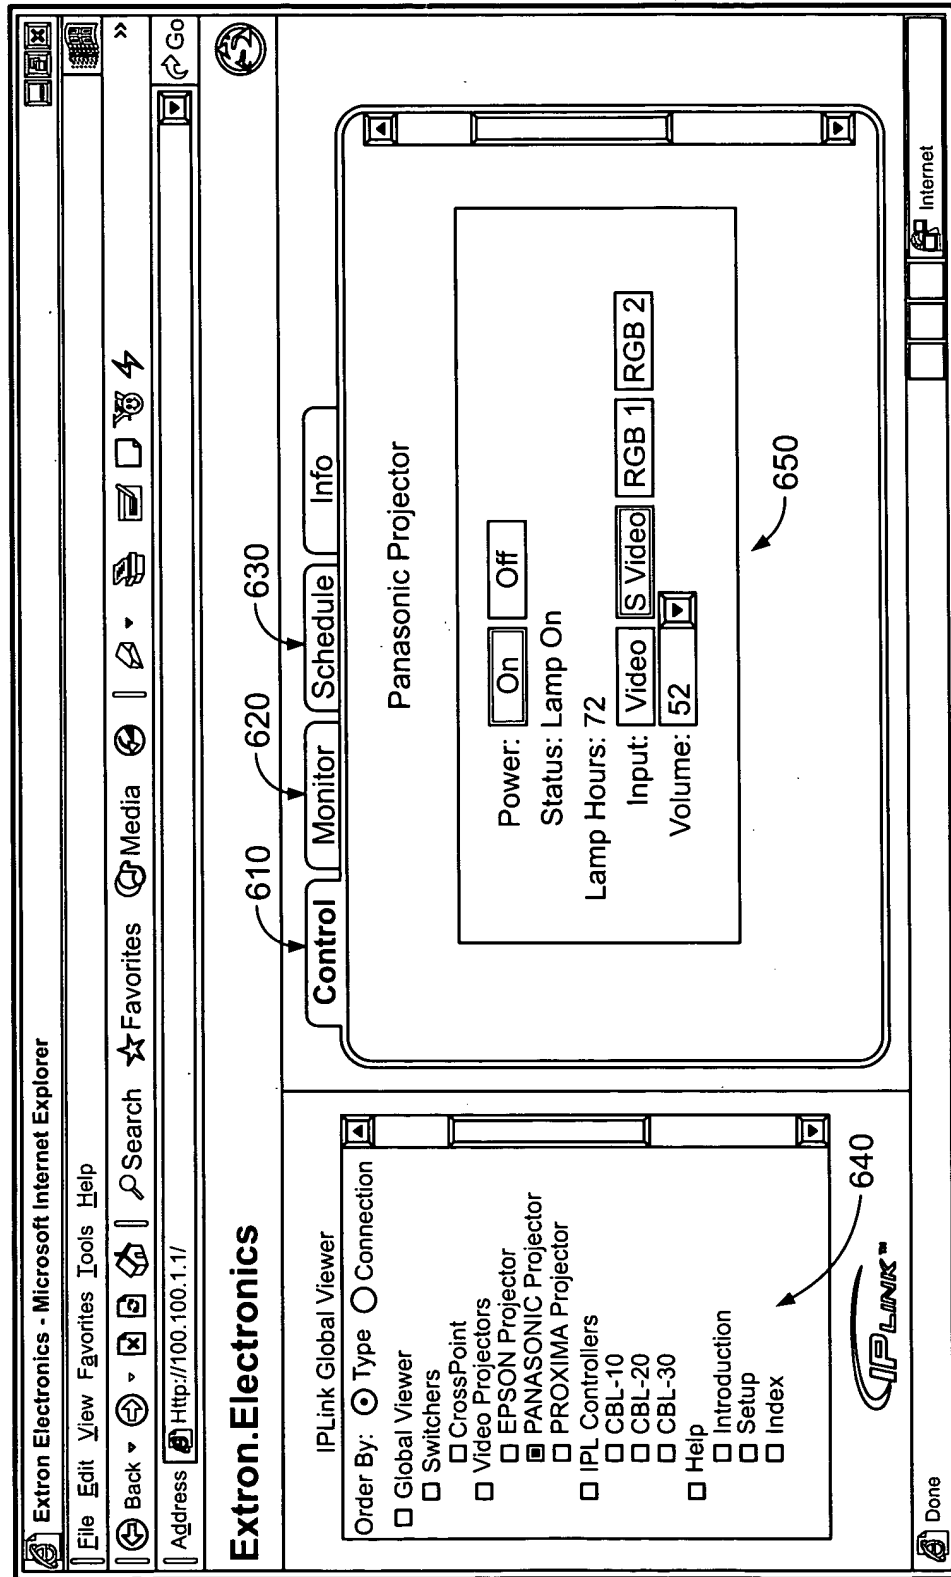


FIG. 6

Control	Monitor	Schedule	Info
Samsung SyncMaster 403T			
Power:		On	Off
Input:		Video 1	Video 2
		RGB 1	RGB 2
			RGB 3
Connection Status: Disconnected			
Aspect Ratio (Video):		Expand 1	Expand 2
		Panorama	Zoom 1
Aspect Ratio (RGB):		Expand 1	Expand 2
Auto Image:		Auto Image	

FIG. 7

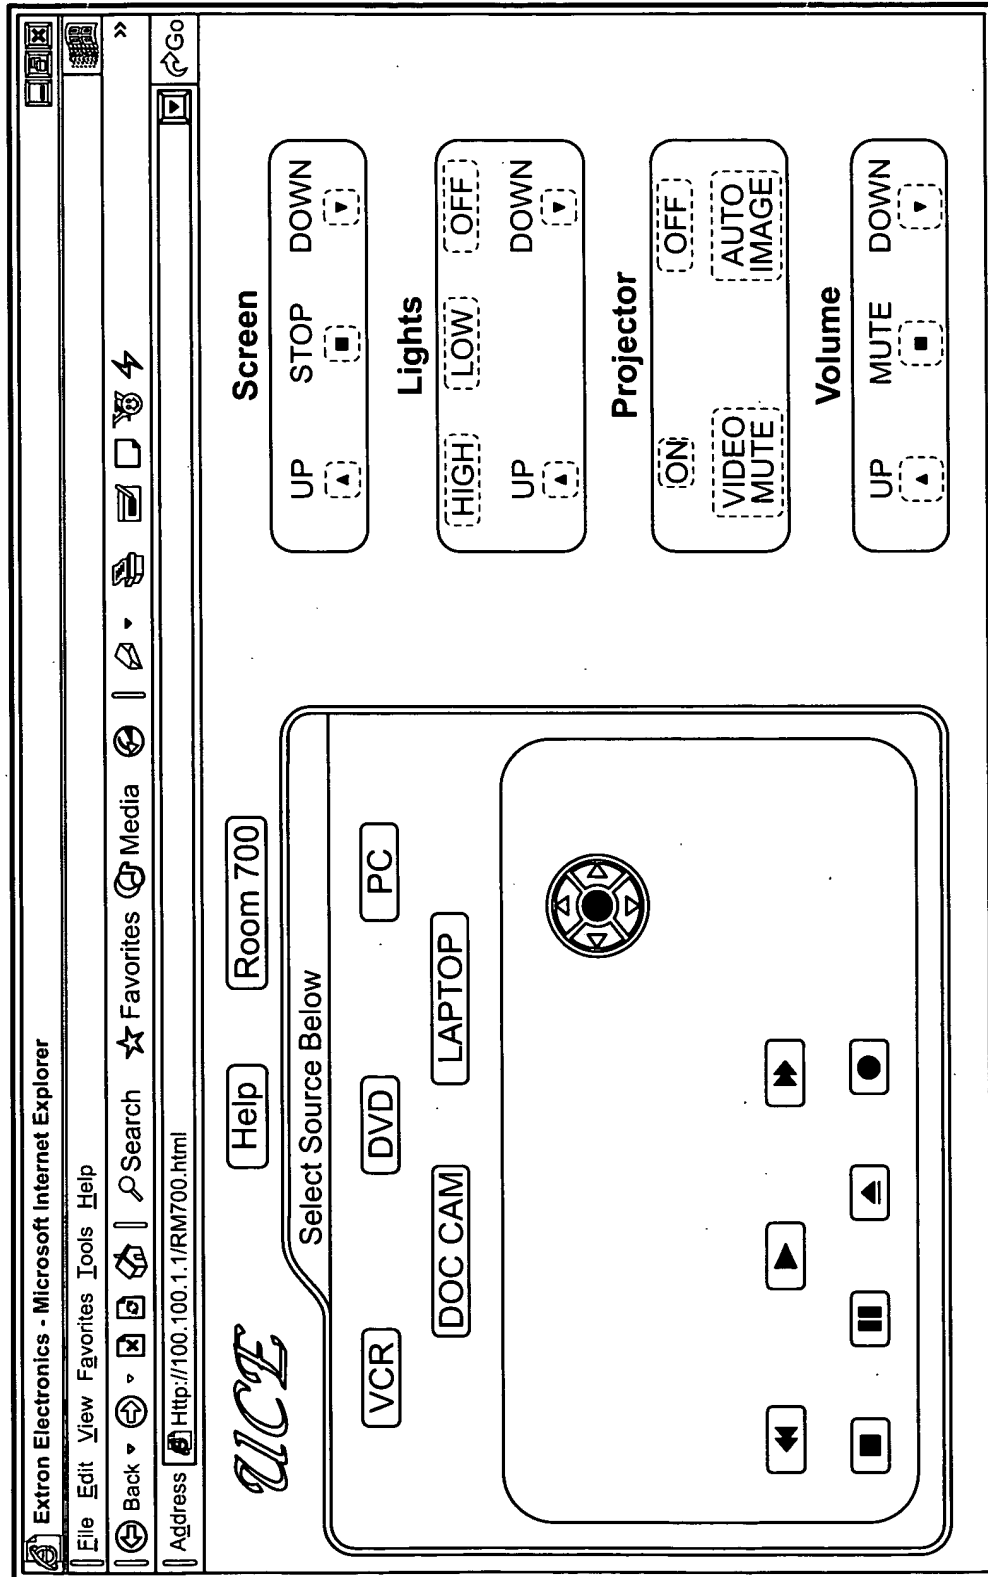


FIG. 8

Control

Monitor

Schedule

Info

Samsung SyncMaster 403T

Monitor Connection Status: ☒ Enabled

Current: Disconnected

When: Disconnected

Notify Addresses: ☒ Enabled

Wed, 13 Feb 2003 18:32

FIG. 9

Control

Monitor

Schedule

Info

Samsung SyncMaster 403T

Scheduled At:

12:00

Enabled

Mon	Tue	Wed	Thu	Fri	Sat	Sun
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Actions: Power Control : off

Wed, 13 Feb 2003 18:33

FIG. 10

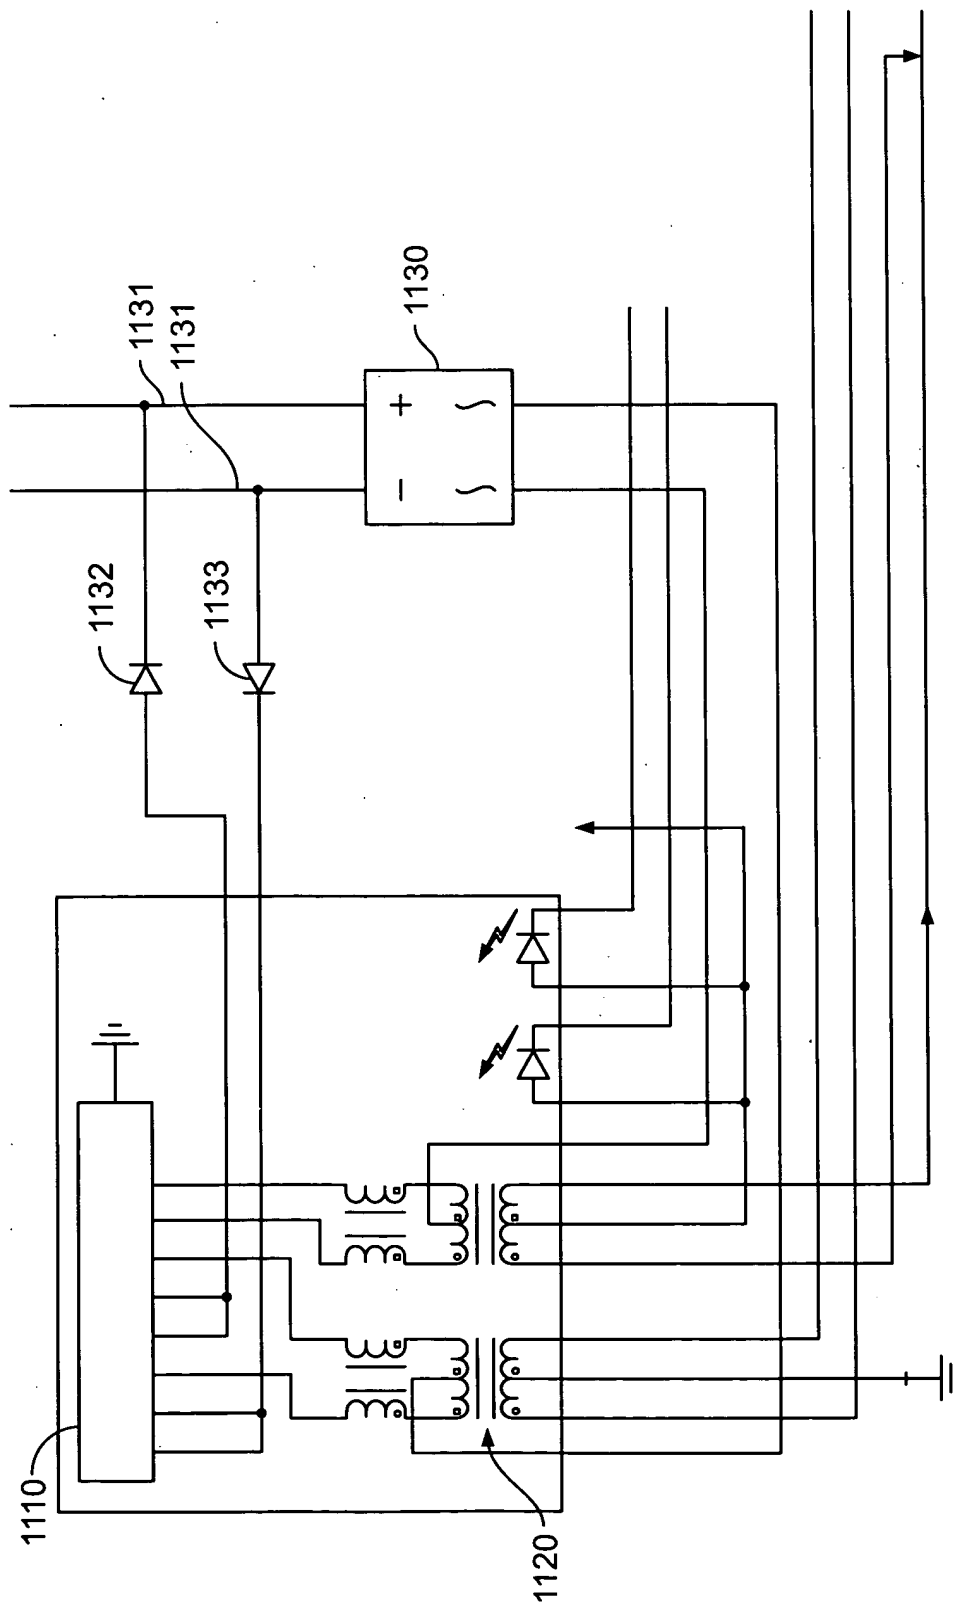


FIG. 11A

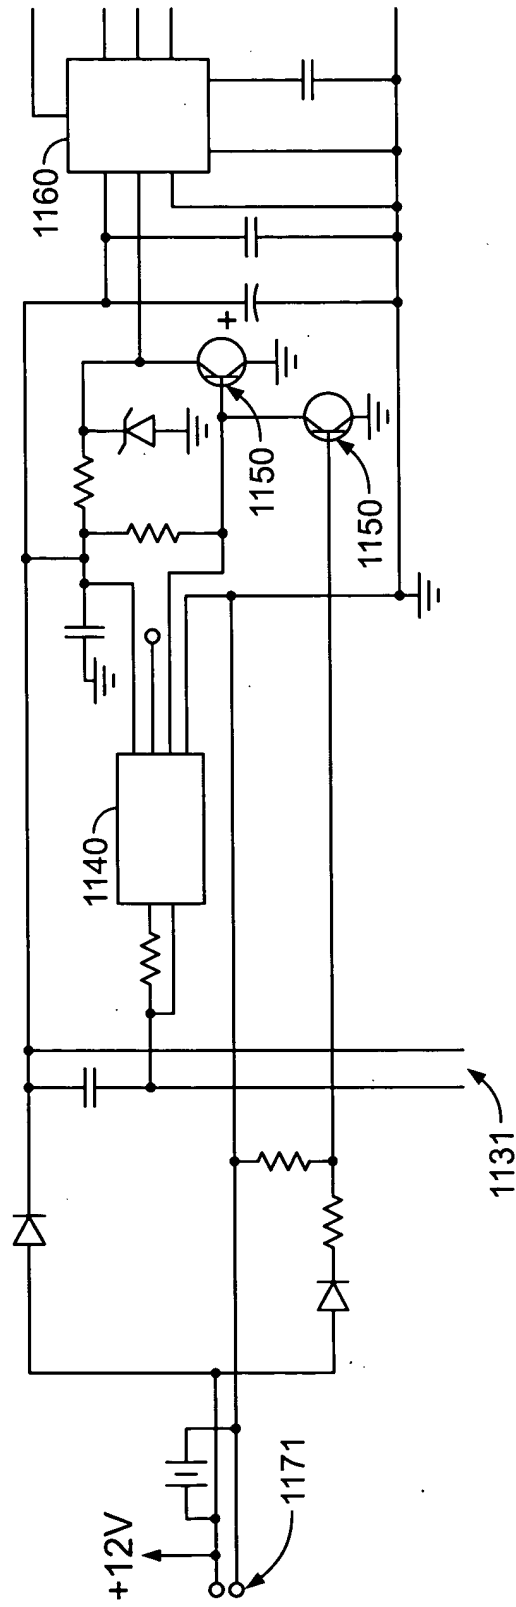


FIG. 11B

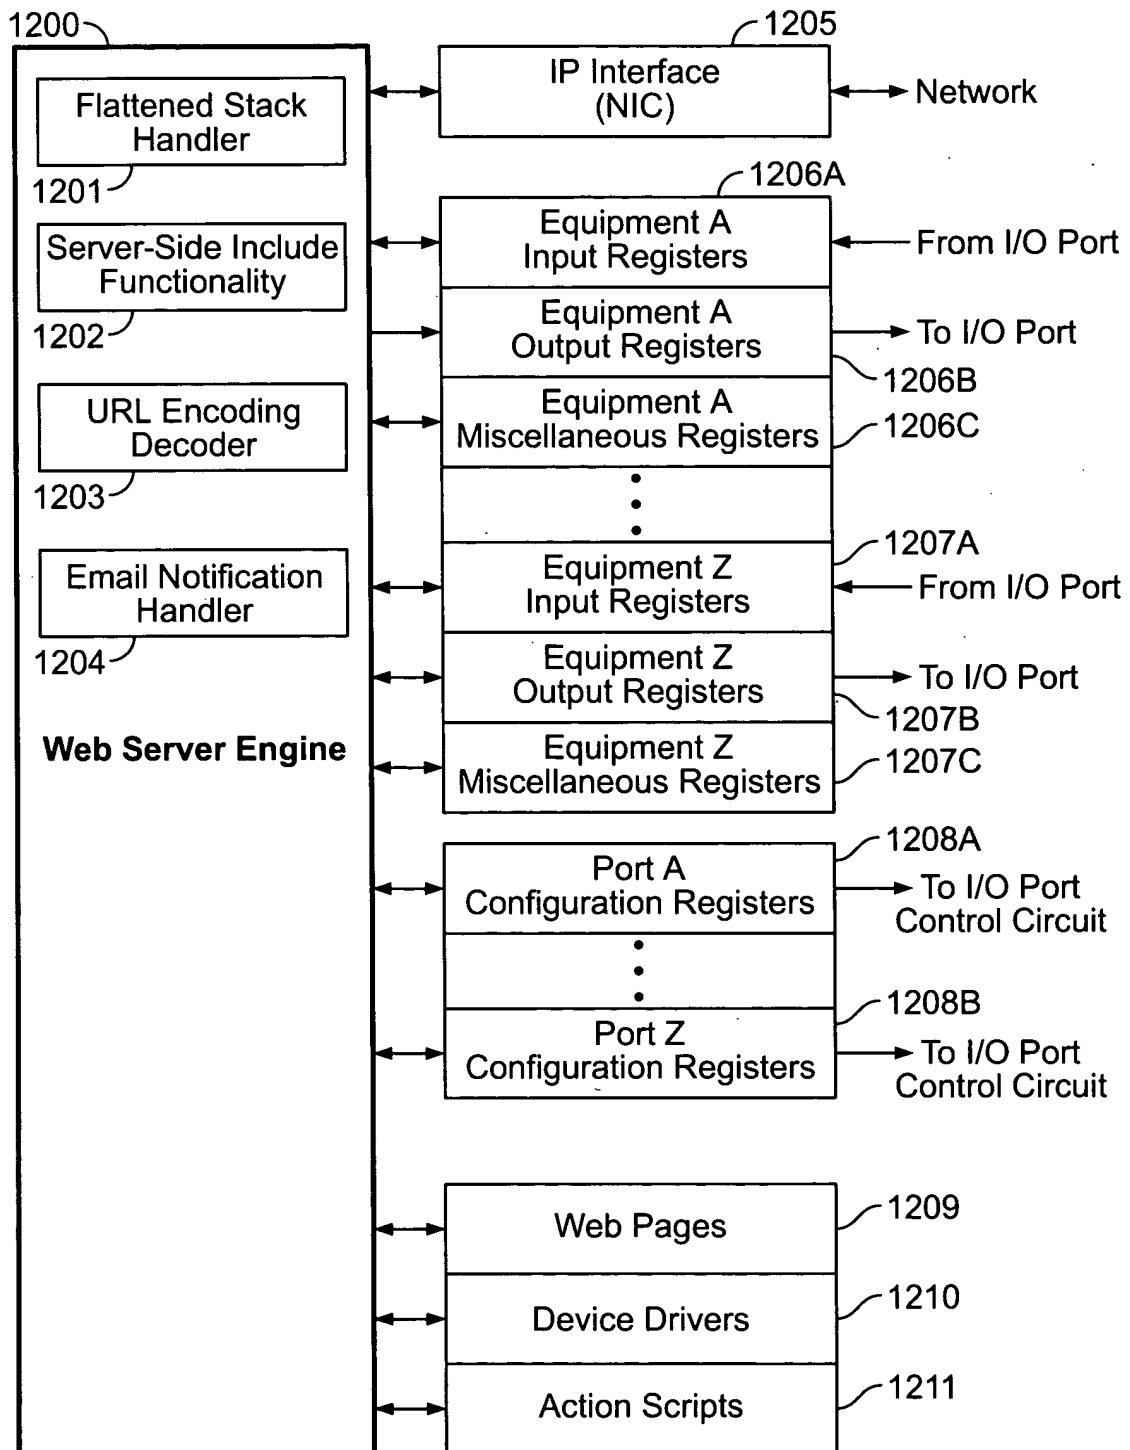


FIG. 12

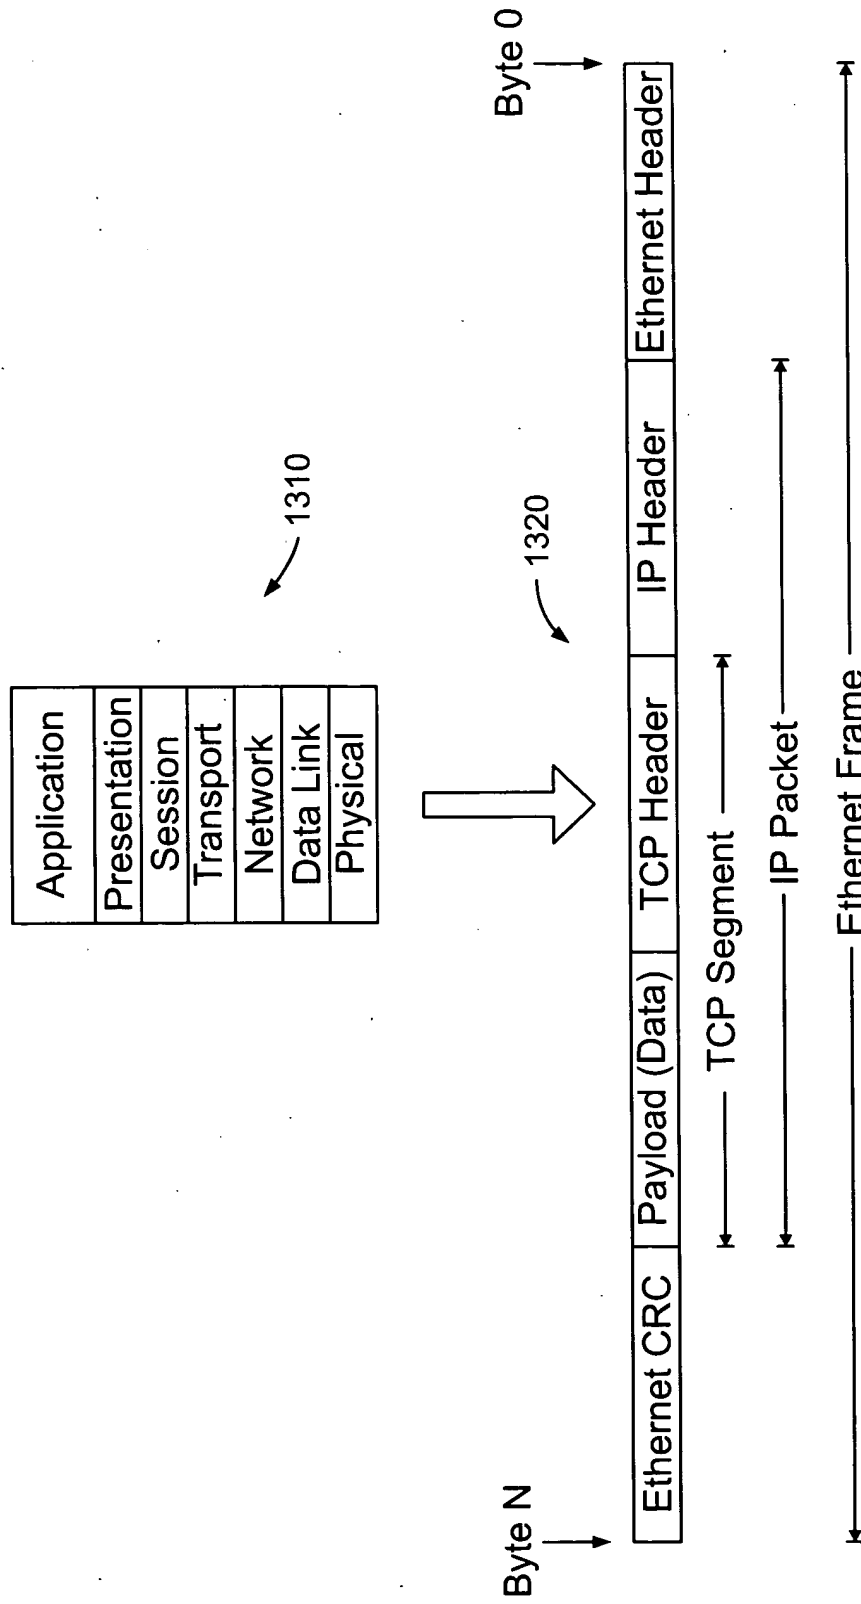


FIG. 13

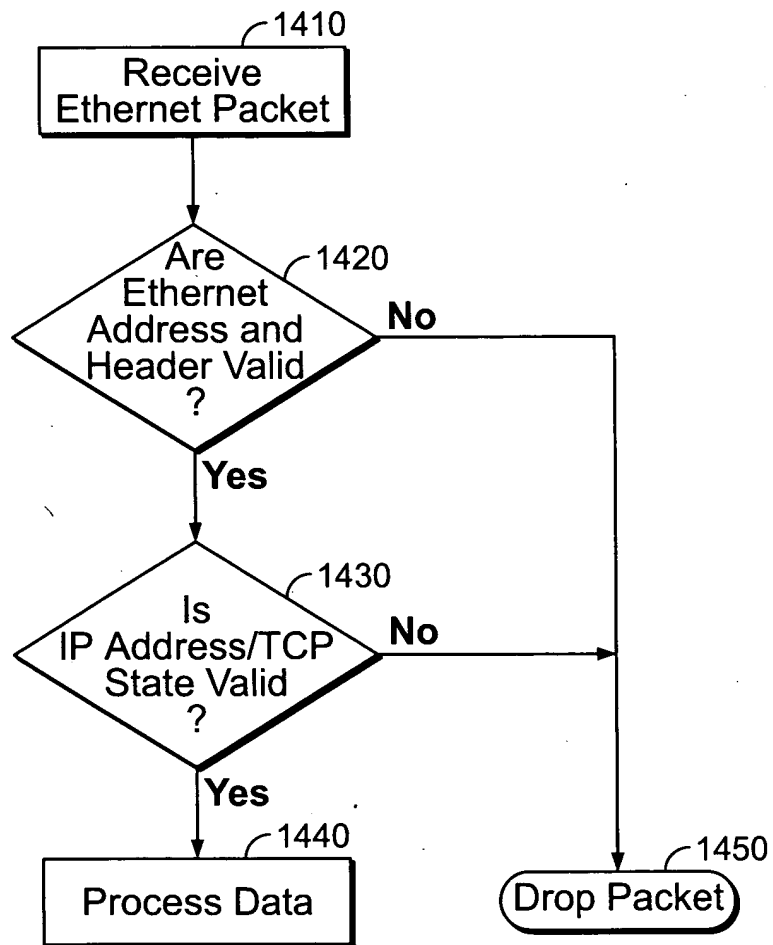


FIG. 14

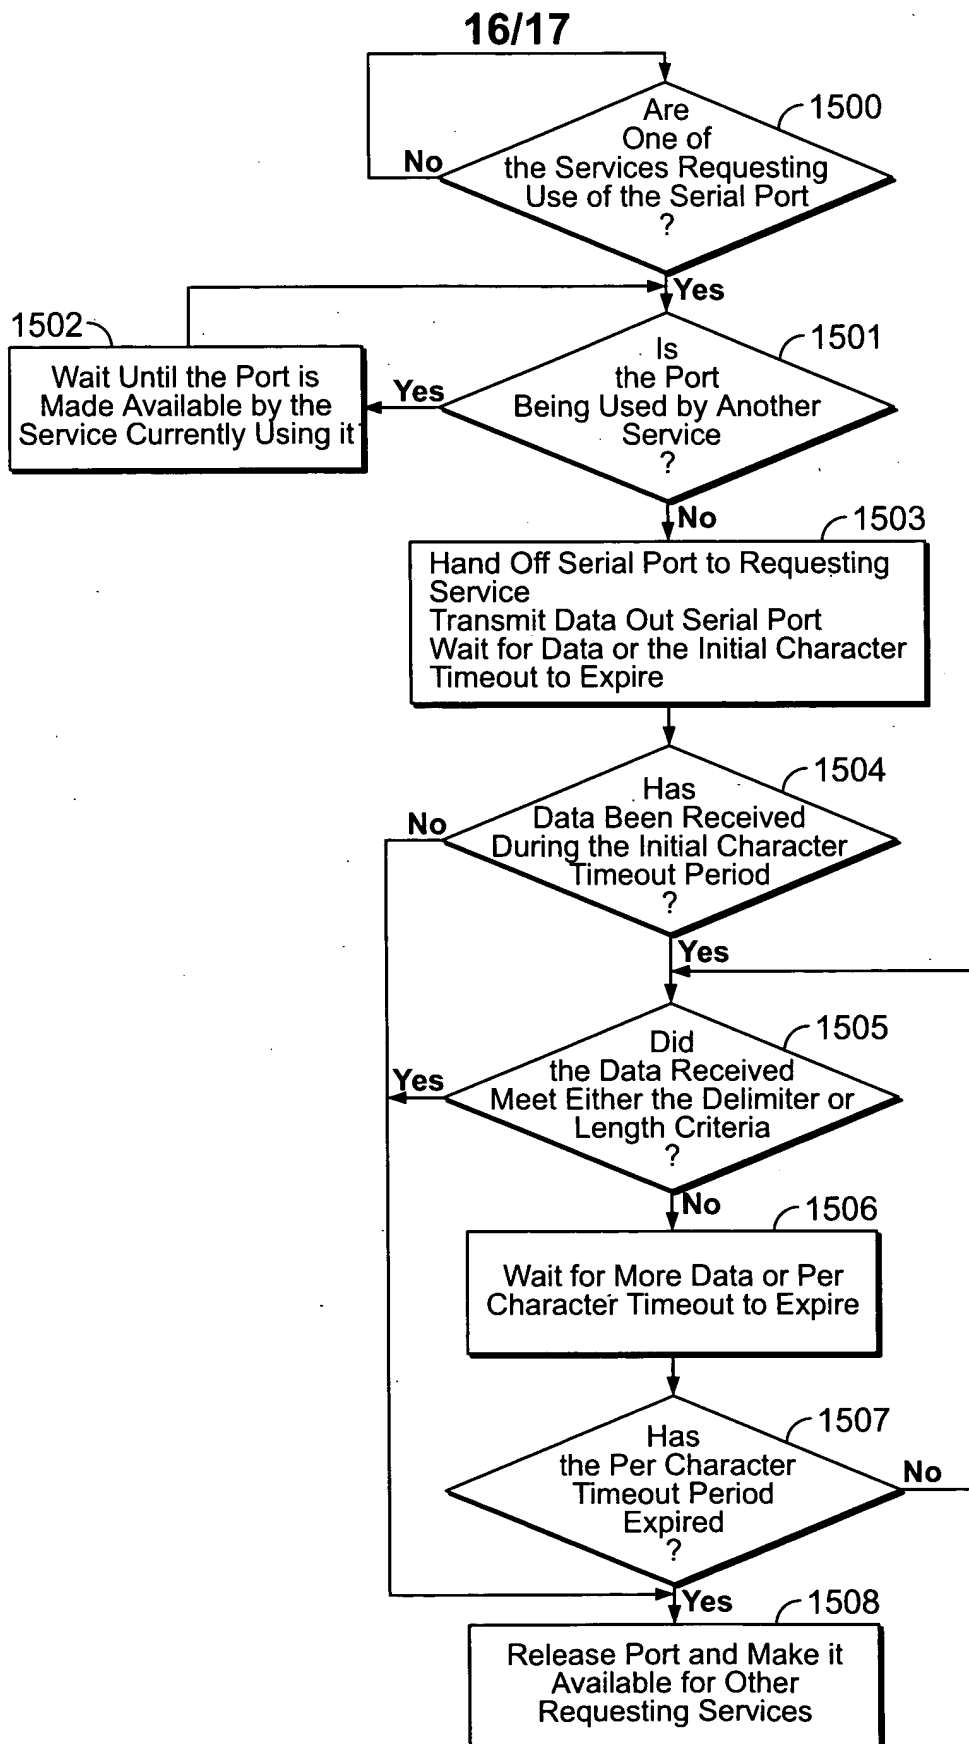


FIG. 15

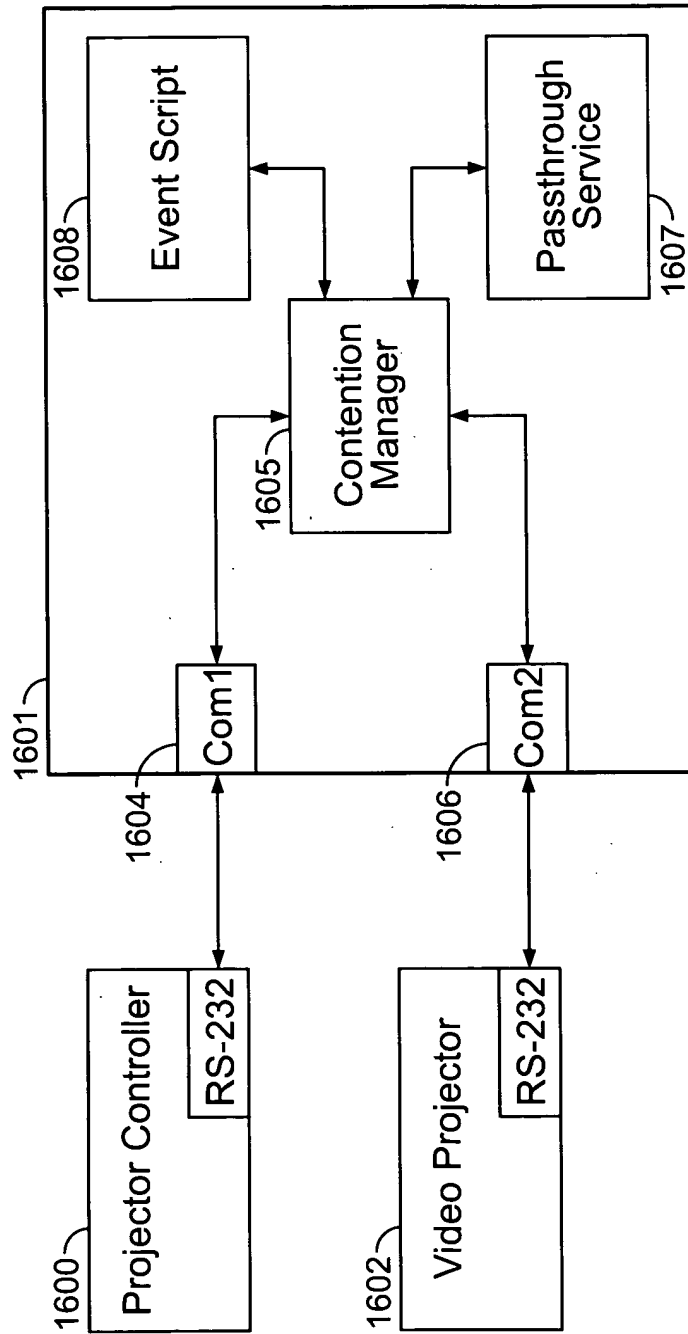


FIG. 16